



Alibi memory

- Ring memory for up to 49,152 measuring results (744 measuring results per day!)
- Saved measuring results cannot be changed or cleared. If the maximum memory capacity is reached, then the oldest value will be overwritten
- In addition to the measuring result, the date, time, tare value, a sequential number and the serial number of the balance are also saved.
- Saved measuring results can be searched and recalled easily
- The alibi memory can also be used for applications which do not require verification
- Complies with WELMEC 2.5




Touchscreen platform scale with enormous range of functions, available also with EC type approval [M]




Easy input of text and values

Using large keypad, e.g. up to 80 item descriptions, user name, packaging weights for tare containers etc.

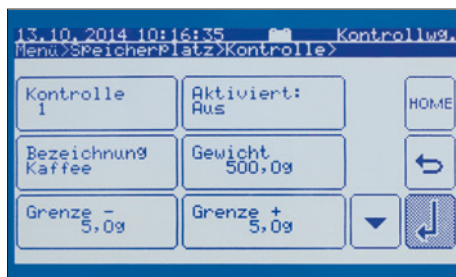

80 memories for each mode

e.g. for Checkweighing, PRE-TARE, reference weight, target value when dispensing, item descriptions, user name, weights for tare containers, etc. Easy to enter using the large-scale keypad

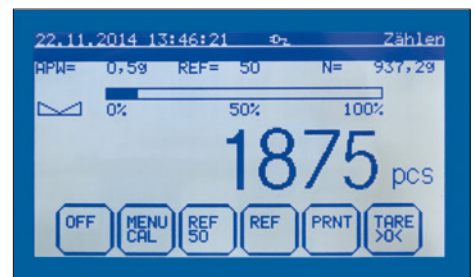

Professional counting function

All relevant counting information at a glance, such as, e.g., reference weight, reference quantity, total count, total weight, tare container weight, available weighing range and much more

Features

- **Convenient recipe weighing:** 99 recipes with 10 components each can be stored in plain text. There is a function to adjust the other components if the initial weight was too high. The actual values and the desired values well as the proportionate percentages can be printed afterwards.
- **Multiplier function:** recipes with the ingredient weights recorded as percentage values can easily be replicated by entering a new target weight. The ideal solution for the preparation of larger containers, bulk packs etc.
- **Rapid function** for shortened stabilisation time with reduced readout
- **Control outputs (optocoupler, digital I/O)** to connect relays, signal lamps, valves etc. (35V/80mA)

Technical data

- Large backlit LCD touch display, digit height 18 mm, screen diagonal 5,8" (127×74 mm)
- Weighing plate dimensions, stainless steel W×D×H
 - A 228×228×95 mm
 - B 315×308×75 mm
 - C 450×350×115 mm
 - D 650×500×142 mm
- Dimensions of display device W×D×H 200×155×68 mm

- Cable length of display device approx., for models with weighing plate size
 - A 1 m
 - B, D 2 m
 - C 0,6 m
- Permissible ambient temperature 10 °C/40 °C

Accessories

- **Rechargeable battery pack external**, operating time up to 20 h without backlight, charging time approx. 10 h, KERN KS-A01
- **Signal lamp** for visual support of weighing with tolerance range, KERN IKT-A04
- **RS-232/Ethernet adapter** for connection to an IP-based Ethernet network, KERN YKI-01
- **RS-232/USB adapter**, to connect peripheral devices with USB connection, KERN AFH 12
- **Set for underfloor weighing**, consists of platform, bow, hook, only for models with weighing plate B, KERN DS-A01
- **Stand** to elevate display device, for models with weighing plate size B, C, height of stand approx. 480 mm, KERN IKT-A06
- **Wall mount** for display device, KERN IKT-A03
- **Suitable printers** see *Accessories*

Modes

- ① Weighing
- ② Counting
- ③ Dispensing
- ④ Recipe weighing
- ⑤ Checkweighing
- ⑥ Totalising with daily total
- ⑦ Percentage determination
- ⑧ Animal weighing
- ⑨ Surface weight
- ⑩ Density determination, only with B
- ⑪ Rapid function

Functions

- Capacity display with ①, ②, ⑤-⑦, ⑨-⑩
- Dispensing aid (-/+), with ③, ④
- Net/gross display, permanent, with ①, ③-⑤, ⑧-⑪
- Variable reference quantity, with ②
- Automatic reference optimisation, with ②
- PRE-TARE numerical or from the memory unit, with ①-⑦, ⑪
- Entering of item or batch description, operator etc., with ①-⑦, ⑪
- Freely programmable weighing unit, e.g. display direct in special units such as length of thread g/m, grammage g/m², or similar, with ⑨
- Date/time, with ①-⑪
- Statistical function, with ①
- GLP printout, with ①-⑪
- Individual formatting of up to 16 printer forms, recipes, operating mode master data in MS Excel, import via RS-232, for examples, see the internet, with ①-⑪

STANDARD



OPTION



Model	Weighing range [Max] kg	Readout [d] g	Smallest part weight [Normal] g/piece	Net weight approx. kg	Weighing plate	Options	
						DAkKS Calibr. Certificate	
KERN						DKD KERN	
IKT 6K0.1	6	0,1	1	8	B	963-128	
IKT 12K0.2*	12	0,2	2	8	B	963-128	
IKT 30K0.5	30	0,5	5	8	B	963-128	
IKT 60K1L	60	1	10	10	C	963-129	
IKT 120K2L*	120	2	20	10	C	963-129	
IKT 150K2XL	150	2	20	20	D	963-129	
IKT 300K5XL	300	5	50	20	D	963-129	
High resolution readout							
IKT 3K0.01S	3	0,01	0,1	6	A	963-127	
IKT 8K0.05	8	0,05	0,5	8	B	963-128	
IKT 16K0.1	16	0,1	1	8	B	963-128	
IKT 30K0.1	30	0,1	1	8	B	963-128	
IKT 30K0.1L	30	0,1	1	10	C	963-128	
IKT 36K0.2*	36	0,2	2	8	B	963-128	
IKT 36K0.2L	36	0,2	2	10	C	963-128	
IKT 60K0.2L	60	0,2	2	10	C	963-129	
IKT 65K0.5L	65	0,5	5	10	C	963-129	
IKT 100K0.5L	100	0,5	5	10	C	963-129	
IKT 150K1L	150	1	10	10	C	963-129	

* ONLY WHILE STOCKS LAST !

KERN Pictograms

 Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)	 GLP/ISO log: The balance displays serial number, user ID, weight, date and time, regardless of a printer connection	 Suspended weighing: Load support with hook on the underside of the balance
 Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required	 GLP/ISO log: With weight, date and time. Only with KERN printers	 Battery operation: Ready for battery operation. The battery type is specified for each device
 Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 Piece counting: Reference quantities selectable. Display can be switched from piece to weight	 Rechargeable battery pack: Rechargeable set
 Alibi memory: Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.	 Recipe level A: The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out	 Universal mains adapter: with universal input and optional input socket adapters for A) EU, GB B) EU, GB, CH, USA C) EU, GB, CH, USA, AUS
 Data interface RS-232: To connect the balance to a printer, PC or network	 Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display	 Mains adapter: 230V/50Hz in standard version for EU. On request GB, USA or AUS version available
 RS-485 data interface: To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible	 Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, multiplier function, adjustment of recipe when dosages are exceeded or barcode recognition	 Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request
 USB data interface: To connect the balance to a printer, PC or other peripherals	 Totalising level A: The weights of similar items can be added together and the total can be printed out	 Weighing principle: Strain gauges Electrical resistor on an elastic deforming body
 Bluetooth* data interface: To transfer data from the balance to a printer, PC or other peripherals	 Percentage determination: Determining the deviation in % from the target value (100 %)	 Weighing principle: Tuning fork A resonating body is electromagnetically excited, causing it to oscillate
 WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals	 Weighing units: Can be switched to e.g. nonmetric units at the touch of a key. See balance model. Please refer to KERN's website for more details	 Weighing principle: Electromagnetic force compensation Coil inside a permanent magnet. For the most accurate weighings
 Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.	 Weighing with tolerance range: (Check-weighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model	 Weighing principle: Single cell technology Advanced version of the force compensation principle with the highest level of precision
 Interface for second balance: For direct connection of a second balance	 Hold function: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value	 Verification possible: The time required for verification is specified in the pictogram +3 DAYS
 Network interface: For connecting the scale to an Ethernet network	 Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram.	 DAkkS calibration possible (DKD): The time required for DAkkS calibration is shown in days in the pictogram +3 DAYS
 Wireless data transfer: between the weighing unit and the evaluation unit using an integrated radio module	 Stainless steel: The balance is protected against corrosion	 Package shipment: The time required for internal shipping preparations is shown in days in the pictogram 1 DAY
 KERN Communication Protocol (KCP): It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems		 Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram 2 DAYS

KERN – Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2500 kg. In combination with a DAkkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAkkS calibration laboratory today is one of the most modern and best-equipped DAkkS calibration laboratories for balances, test weights and force-measurement in Europe.

Thanks to the high level of automation, we can carry out DAkkS calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAkkS calibration of balances with a maximum load of up to 50 t
- DAkkS calibration of weights in the range of 1 mg – 2500 kg
- Volume determination and measuring of magnetic susceptibility (magnetic characteristics) for test weights
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAkkS calibration certificates in the following languages DE, GB, FR, IT, ES, NL, PL
- Conformity evaluation and reverification of balances and test weights

Your KERN specialist dealer: